
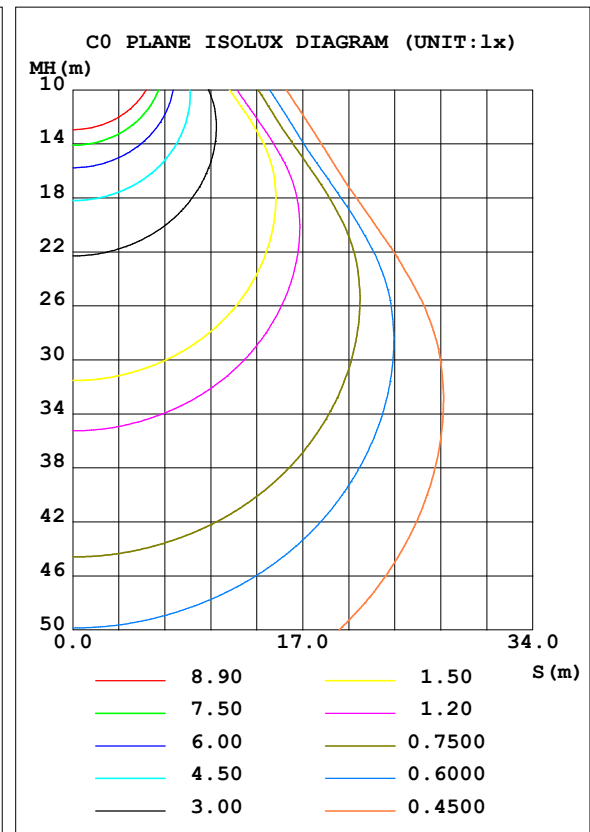


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.98 lm/W			
MODEL	6060	I <sub>max</sub> (cd)	1491	S/MH (C0/180)	1.26
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3444.5	η UP, DN (C0-180)	0.0, 49.1
NOMINAL FLUX (lm)	3444.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230.8	η down (%)	100.0	CIBSE SHR MAX	1.35

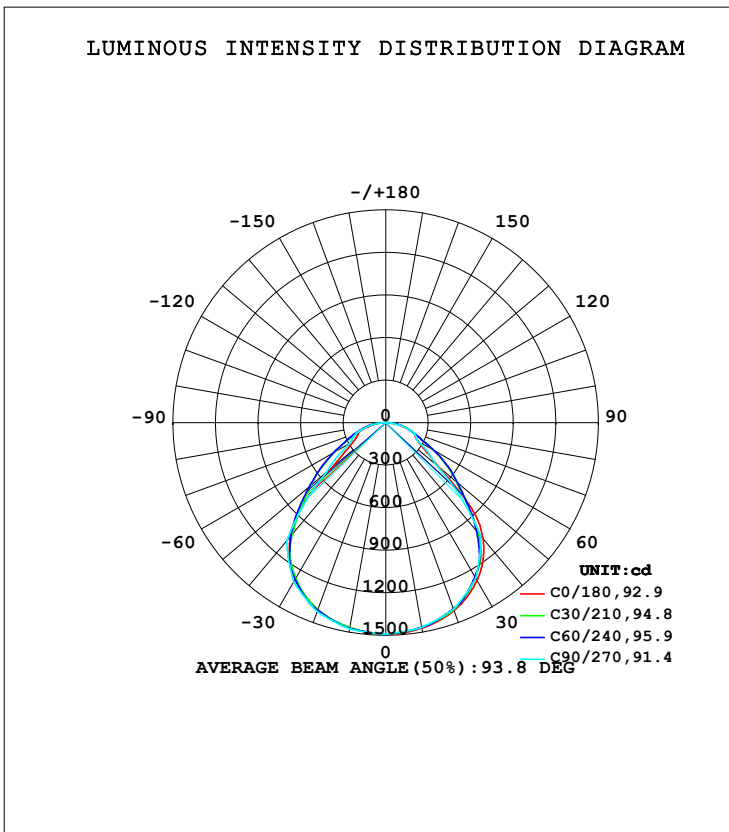

H(β) Range: -90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date:

V(B) Range: -80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity: 65.0%  
Test Distance: 10.095m [K=1.0000]  
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1471	1464	1466	1461	1469	1468	1477	1471	0- 10	141.0	141.0	4.09,4.09
20	1410	1395	1400	1390	1402	1402	1417	1408	10- 20	406.7	547.7	15.9,15.9
30	1286	1261	1268	1257	1273	1275	1297	1286	20- 30	620.2	1168	33.9,33.9
40	1068	1015	1042	1012	1048	1037	1087	1059	30- 40	729.9	1898	55.1,55.1
50	488.7	654.8	462.7	629.2	500.0	695.7	546.2	673.6	40- 50	639.2	2537	73.7,73.7
60	264.4	417.4	259.0	418.5	261.4	453.6	288.2	456.1	50- 60	436.4	2973	86.3,86.3
70	210.3	185.4	212.7	184.9	202.7	200.6	221.7	204.6	60- 70	271.3	3245	94.2,94.2
80	85.80	101.4	92.16	100.7	90.89	119.0	103.2	115.4	70- 80	158.2	3403	98.8,98.8
90	2.459	0	0	0	2.951	0	0	0	80- 90	41.62	3445	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

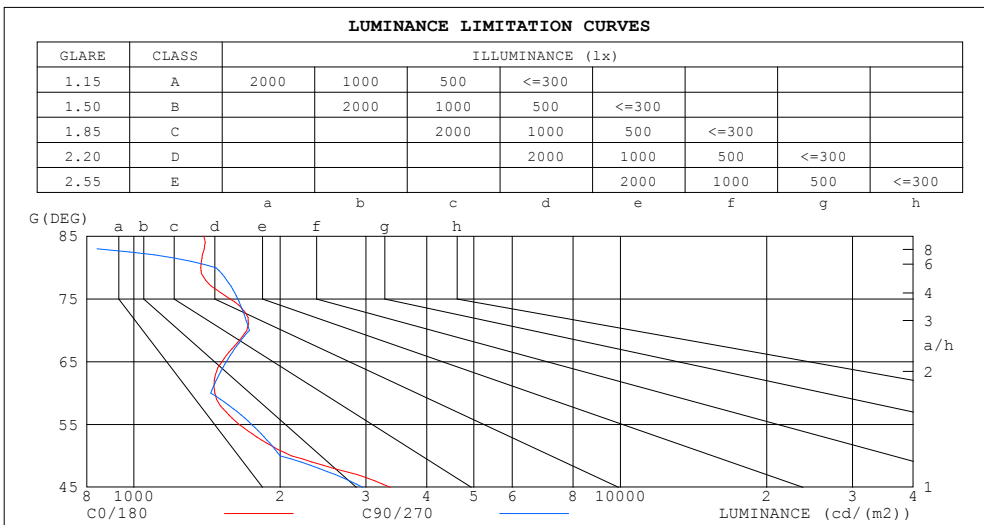

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:



**WEC AND CCEC**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz		
Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

ρ <sub>cc</sub>	80%			70%			50%			30%			10%			0
ρ <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.273	.155	.049	.266	.152	.048	.253	.145	.046	.241	.139	.045	.230	.133	.043	
2.0	.260	.142	.044	.254	.140	.043	.242	.135	.042	.232	.130	.041	.222	.126	.040	
3.0	.243	.129	.039	.238	.127	.038	.228	.123	.038	.219	.120	.037	.210	.116	.036	
4.0	.227	.118	.035	.222	.116	.034	.213	.113	.034	.205	.110	.033	.197	.107	.033	
5.0	.212	.108	.031	.208	.107	.031	.200	.104	.031	.192	.102	.030	.186	.099	.030	
6.0	.198	.099	.028	.194	.098	.028	.187	.096	.028	.181	.094	.028	.175	.092	.027	
7.0	.186	.092	.026	.182	.091	.026	.176	.089	.026	.170	.087	.025	.165	.086	.025	
8.0	.175	.085	.024	.172	.085	.024	.166	.083	.024	.161	.081	.023	.156	.080	.023	
9.0	.165	.080	.022	.162	.079	.022	.157	.078	.022	.152	.076	.022	.148	.075	.022	
10.0	.155	.075	.021	.153	.074	.021	.149	.073	.021	.144	.072	.020	.140	.071	.020	

ρ <sub>cc</sub>	80%			70%			50%			30%			10%			0
ρ <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.178	.156	.137	.152	.134	.118	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.168	.132	.102	.144	.114	.088	.099	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.159	.114	.078	.137	.098	.068	.094	.068	.047	.054	.040	.028	.017	.013	.009	
4.0	.151	.100	.062	.130	.087	.054	.089	.061	.038	.052	.035	.022	.017	.012	.007	
5.0	.144	.090	.050	.124	.078	.043	.085	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.137	.081	.041	.118	.070	.036	.081	.049	.025	.047	.029	.015	.015	.009	.005	
7.0	.130	.074	.035	.112	.064	.030	.078	.045	.022	.045	.027	.013	.015	.009	.004	
8.0	.124	.068	.030	.107	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.119	.064	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.008	.003	
10.0	.113	.059	.023	.098	.051	.020	.068	.036	.014	.040	.021	.009	.013	.007	.003	

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz										
Lamp Flux:3444.5x1 lm										
NAME: 6060			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.: 1			
MFR.:			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.1	16.5	15.4	16.7	16.9	15.0	16.4	15.3	16.6	16.8
3H	15.9	17.2	16.2	17.4	17.6	15.8	17.1	16.1	17.3	17.5
4H	16.2	17.5	16.5	17.7	17.9	16.2	17.5	16.6	17.7	18.0
6H	16.5	17.7	16.9	17.9	18.2	16.6	17.8	17.0	18.1	18.3
8H	16.6	17.7	17.0	18.0	18.3	16.7	17.8	17.1	18.1	18.4
12H	16.7	17.8	17.0	18.1	18.4	16.7	17.8	17.0	18.0	18.3
4H 2H	15.5	16.8	15.8	17.0	17.2	15.4	16.7	15.7	16.9	17.2
3H	16.5	17.6	16.9	17.9	18.2	16.5	17.5	16.8	17.8	18.1
4H	17.0	18.0	17.4	18.3	18.6	17.0	18.0	17.4	18.3	18.6
6H	17.5	18.3	17.9	18.7	19.0	17.6	18.4	18.0	18.8	19.1
8H	17.6	18.4	18.0	18.8	19.2	17.7	18.5	18.1	18.9	19.2
12H	17.7	18.5	18.2	18.9	19.3	17.7	18.4	18.1	18.8	19.2
8H 4H	17.3	18.1	17.7	18.5	18.9	17.3	18.1	17.7	18.5	18.8
6H	17.9	18.6	18.4	19.0	19.4	18.0	18.7	18.5	19.1	19.5
8H	18.2	18.8	18.7	19.2	19.7	18.2	18.8	18.7	19.2	19.7
12H	18.4	18.9	18.9	19.3	19.8	18.2	18.7	18.7	19.2	19.7
12H 4H	17.3	18.1	17.8	18.4	18.8	17.3	18.1	17.8	18.4	18.8
6H	18.0	18.6	18.5	19.0	19.5	18.1	18.7	18.6	19.1	19.6
8H	18.3	18.8	18.8	19.3	19.8	18.3	18.8	18.8	19.3	19.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.4 / - 0.5					+ 0.3 / - 0.4				
1.5H	+ 0.3 / - 0.5					+ 0.2 / - 0.6				
2.0H	+ 0.9 / - 1.0					+ 0.8 / - 1.2				

CIE Pub.117, 3445 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.3)  
 Area: 0.36 m2

H(β) Range:-90 - 90DEG  
 H(β) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:10.095m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	64	53	47	63	53	47	62	52	46	41
0.80	74	63	57	73	63	56	71	62	56	50
1.00	82	72	65	80	71	65	78	72	65	58
1.25	88	79	73	87	78	72	84	77	72	65
1.50	93	84	78	91	83	78	88	82	76	70
2.00	99	91	86	97	90	85	94	88	83	76
2.50	102	95	90	100	94	89	96	91	87	80
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	103	101	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

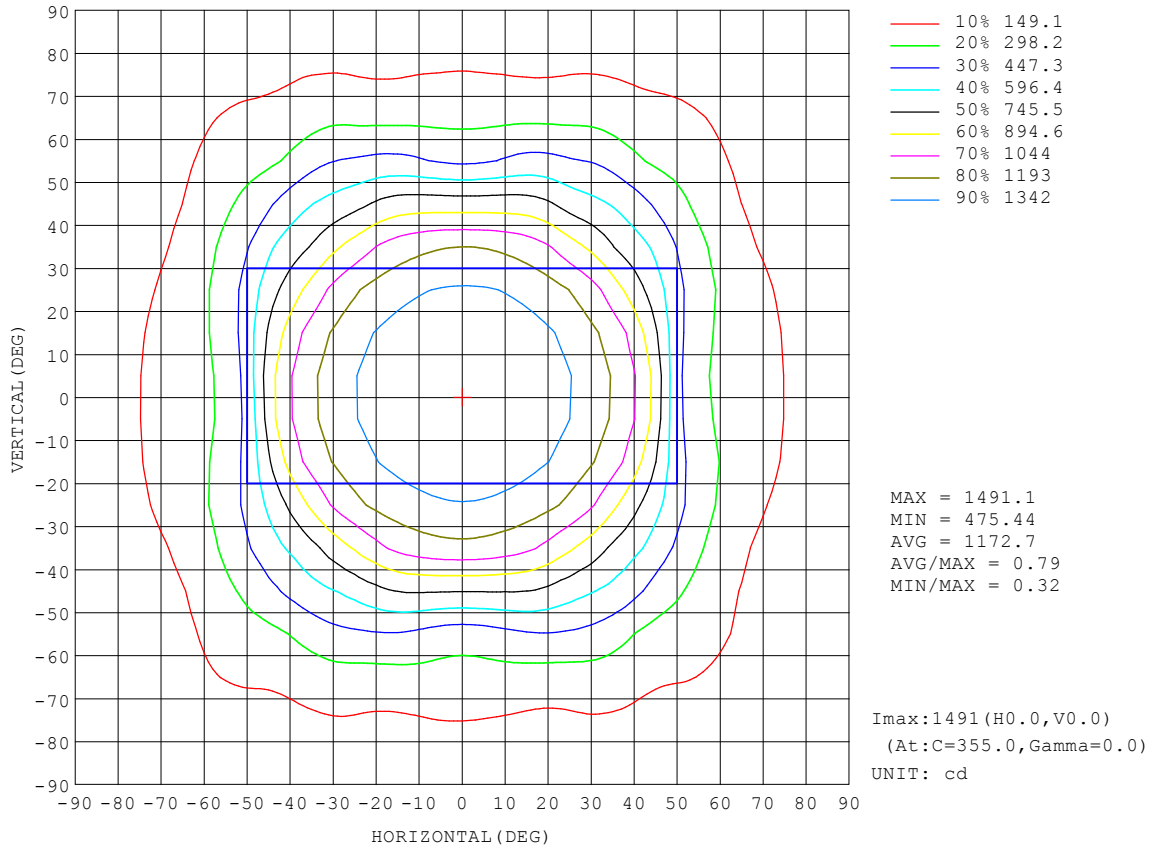


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:10.095m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

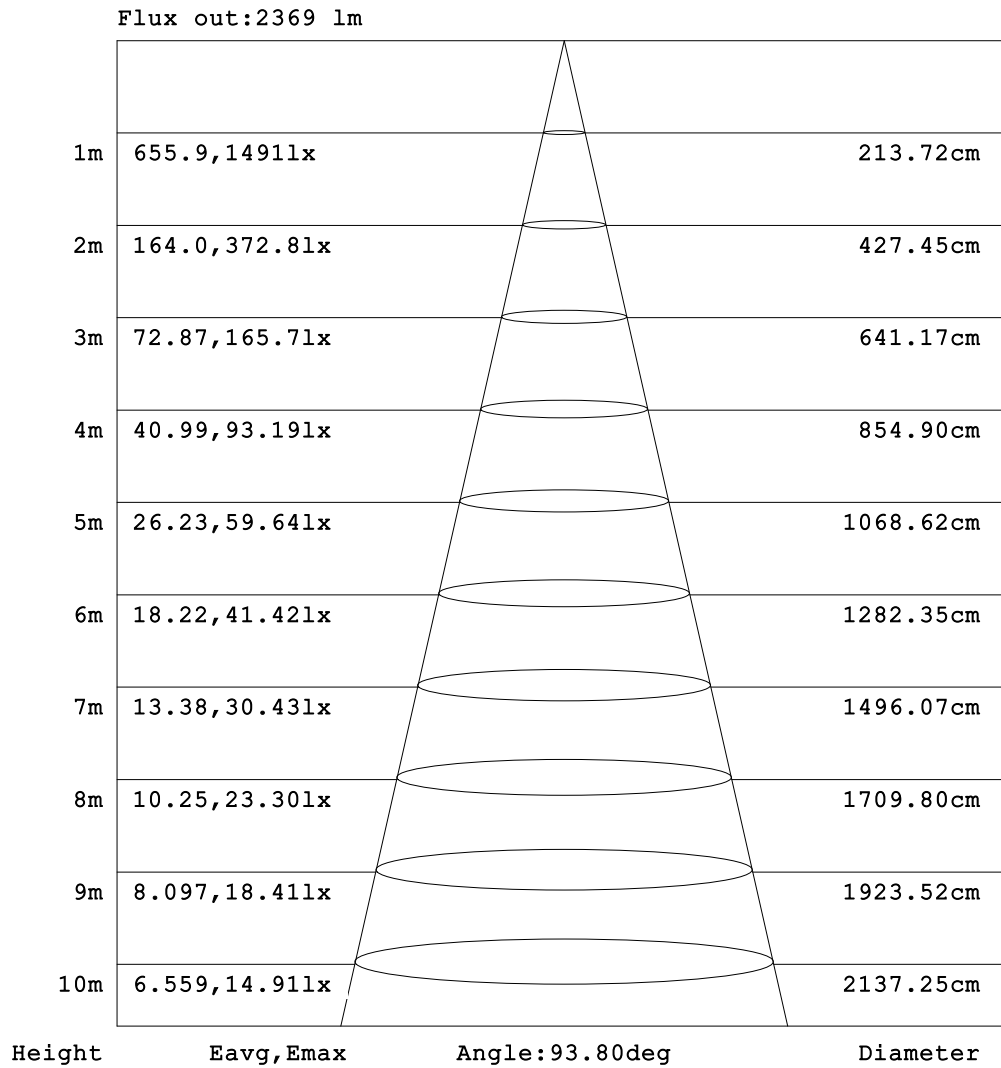


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

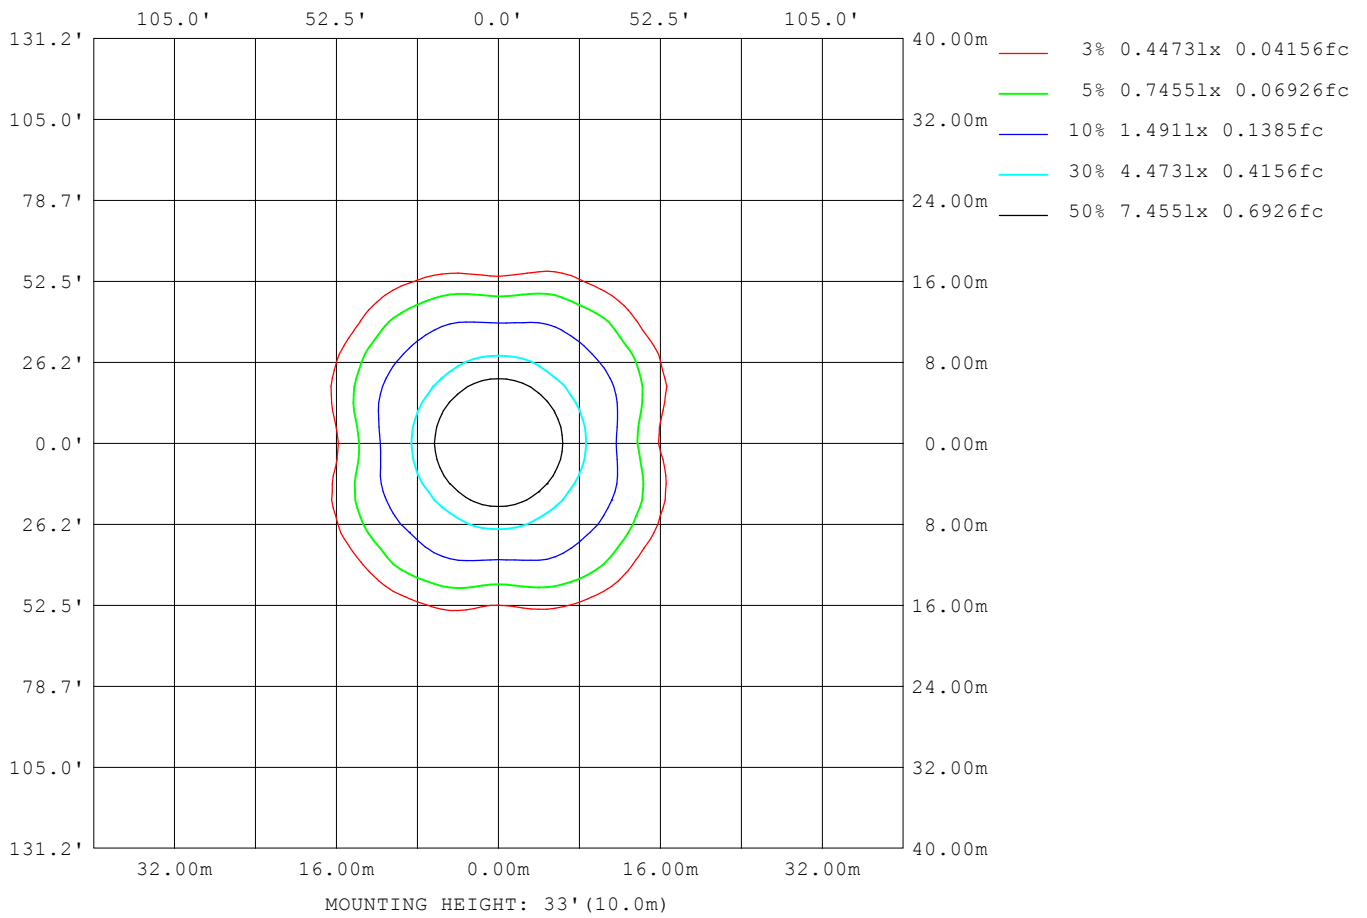

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:

**LED Avg.L Report**

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1487
L_0~180 (75) av	1582
L_0~180 (85) av	1375
L_90~270 (65) av	1613
L_90~270 (75) av	1690
L_90~270 (85) av	0
L_45 (65) av	1862
L_45 (75) av	1756
L_45 (85) av	982

Standard: GB/T 29293-2012

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:

**Planar Illuminance Curve**

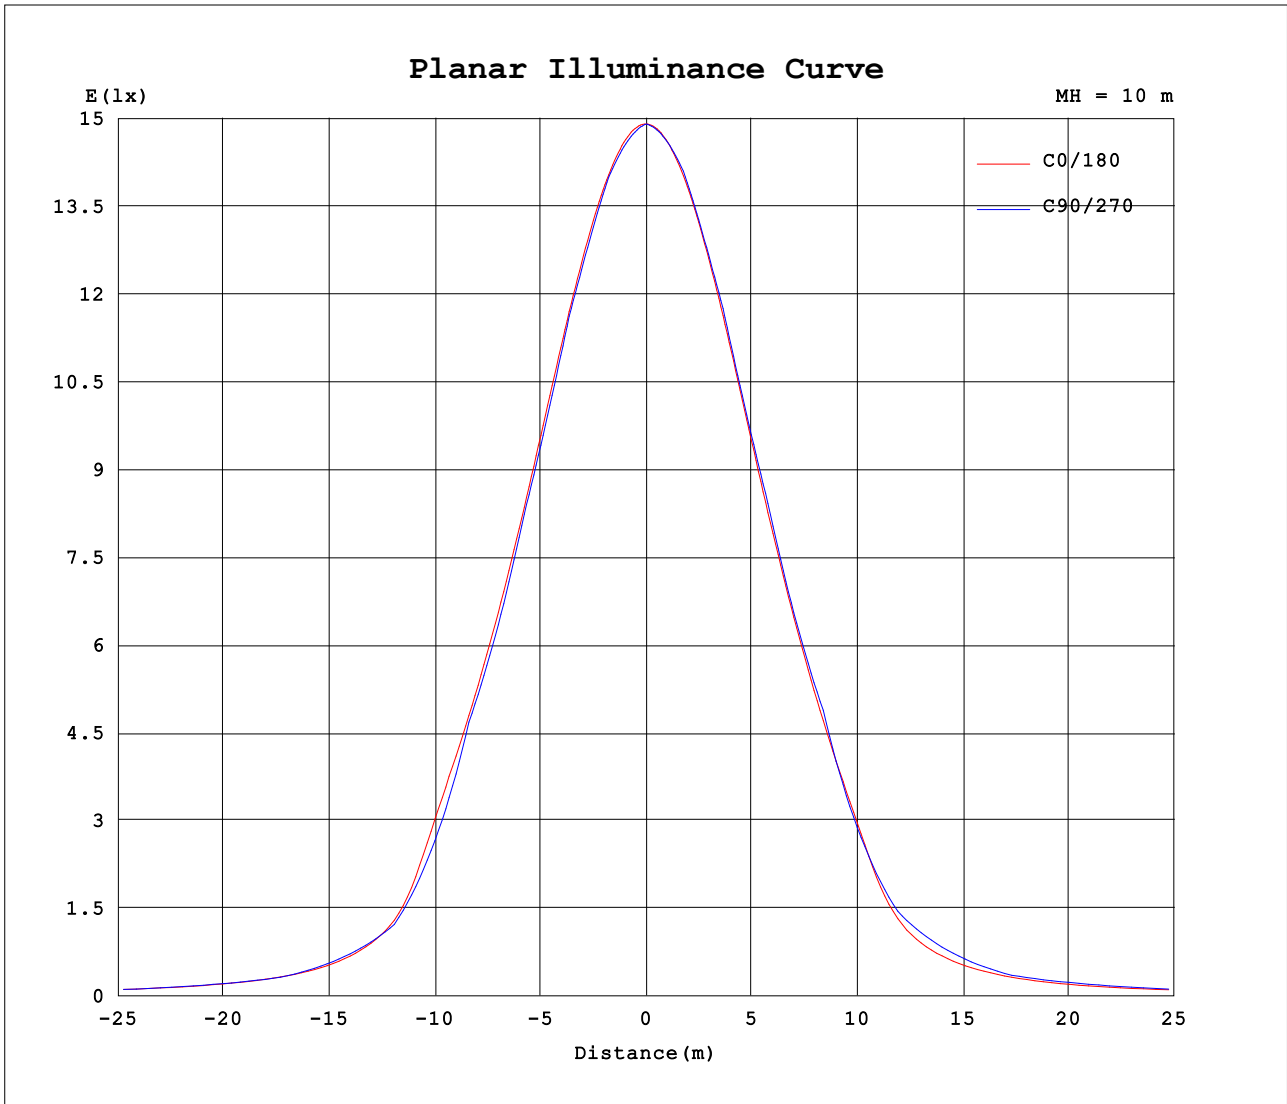

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C (DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491
5	1479	1478	1478	1478	1478	1478	1479	1479	1479	1479	1480	1480	1481	1481	1482	1483	1484	1485	1484
10	1466	1465	1465	1464	1463	1463	1462	1461	1461	1461	1461	1461	1461	1462	1463	1465	1467	1469	1467
15	1433	1432	1432	1432	1431	1432	1432	1433	1435	1436	1434	1433	1433	1434	1434	1436	1439	1442	1440
20	1400	1398	1397	1395	1394	1392	1391	1390	1390	1391	1393	1397	1396	1394	1394	1395	1398	1402	1399
25	1334	1333	1333	1333	1333	1335	1339	1341	1338	1335	1334	1336	1340	1342	1340	1339	1341	1346	1342
30	1267	1265	1262	1259	1257	1255	1254	1255	1257	1263	1261	1259	1261	1266	1267	1264	1266	1273	1268
35	1155	1154	1152	1150	1151	1153	1160	1153	1149	1149	1156	1165	1161	1163	1171	1168	1170	1178	1171
40	1042	1037	1030	1022	1010	997	990	995	1012	1007	999	1010	1034	1027	1033	1039	1038	1048	1039
45	761	780	806	830	835	817	794	792	805	806	790	802	823	822	821	827	819	840	830
50	478	518	572	619	645	654	646	634	629	646	640	634	633	616	583	534	506	500	527
55	373	407	446	476	497	520	539	541	535	532	535	520	503	473	434	382	350	341	359
60	272	308	341	360	372	389	409	419	419	409	409	407	384	369	333	305	272	261	276
65	240	249	256	262	269	278	276	271	273	283	290	289	281	266	259	258	234	222	228
70	207	189	172	173	194	217	215	199	185	181	206	214	198	185	180	191	201	203	193
75	151	143	133	132	145	161	160	156	155	157	162	163	148	119	113	128	146	148	140
80	94.7	98.5	101	103	106	108	107	103	101	108	112	111	105	92.3	80.5	78.4	84.7	90.9	93.1
85	0.36	1.49	3.48	6.35	10.1	14.3	19.2	23.6	27.2	34.8	43.6	48.9	46.7	45.5	41.5	36.1	31.8	42.6	43.6
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.20V I:0.1240A P:26.500W PF:0.9680 Freq:50.00Hz Lamp Flux:3444.5x1 lm		
NAME: 6060	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

Table--3

UNIT: cd

C (DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491	1491
5	1484	1483	1483	1483	1483	1483	1483	1483	1483	1483	1483	1483	1483	1483	1484	1484	1484	1484	1484
10	1466	1466	1465	1465	1465	1466	1467	1468	1469	1470	1472	1473	1474	1475	1476	1476	1477	1477	1476
15	1438	1438	1438	1438	1440	1442	1444	1444	1443	1443	1443	1444	1445	1445	1446	1446	1447	1447	1447
20	1398	1398	1399	1402	1404	1402	1401	1402	1403	1404	1407	1409	1411	1413	1415	1416	1417	1417	1417
25	1341	1343	1347	1347	1345	1345	1348	1352	1356	1355	1353	1353	1353	1354	1355	1356	1357	1358	1358
30	1267	1270	1271	1268	1269	1273	1279	1275	1274	1275	1278	1282	1286	1290	1293	1296	1297	1298	1297
35	1170	1175	1168	1169	1175	1170	1167	1169	1176	1185	1183	1182	1183	1186	1189	1191	1192	1193	1193
40	1041	1037	1034	1042	1026	1021	1030	1037	1028	1029	1040	1052	1061	1071	1079	1085	1087	1087	1084
45	839	846	852	853	844	834	850	855	850	852	875	889	883	864	843	825	817	823	840
50	574	628	671	688	692	697	699	696	698	701	705	706	685	647	601	564	546	557	590
55	398	452	486	519	553	581	579	582	585	579	562	549	530	499	461	431	417	429	459
60	305	339	376	395	417	423	432	454	457	448	429	411	391	363	329	301	288	305	338
65	243	250	268	288	298	298	293	295	303	315	314	297	282	271	262	255	255	257	266
70	181	178	187	205	217	210	192	201	222	242	237	206	185	183	197	209	222	209	195
75	124	123	132	152	166	167	165	167	175	179	175	153	142	143	152	157	162	157	151
80	93.8	96.5	102	107	114	122	122	119	121	123	122	116	113	111	109	106	103	105	109
85	50.4	53.0	54.6	57.1	60.6	54.2	46.0	36.8	29.5	22.5	16.5	11.2	7.00	3.84	1.66	0.40	0.00	0.40	1.66
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:10.095m [K=1.0000]  
Remarks:

